



PPI – Product Information

PRELIMINARY

PPI SP-3009A (0.8 mm thick)

High Performance Double Sided Black Coloured Acrylic Foam (LSE)


DESCRIPTION:

PPI SP-3009A (0.8 mm) is based on high performance double sided black coloured acrylic foam that has been specifically formulated for bonding to Low Energy Surfaces (LSE).

APPLICATIONS:

- Automotive Trim / Badge Mounting Application.

CONSTRUCTION:

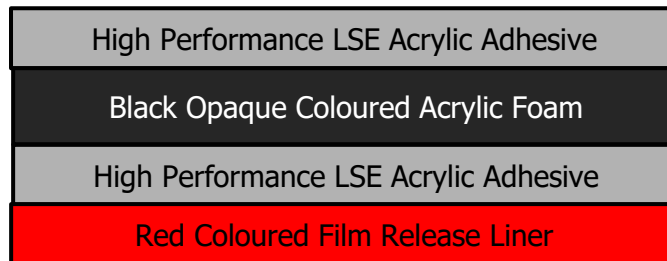

PHYSICAL PROPERTIES

EN VALUE*

SUPPORTING BASE:	Black Opaque Coloured Acrylic Foam	
TOTAL THICKNESS:	0.8 mm	
DENSITY:	720 kg/m ³	
TENSILE STRENGTH:	0.2 kg/10.0 mm	
ULTIMATE ELONGATION:	500.0 %	
PEEL ADHESION (30 minutes):	4,500 g/25.0 mm	180° after 30 mins
PEEL ADHESION (72 hrs)	5,500 g/25.0 mm	180° after 72 hrs
SHEAR ADHESION:	9.0 kg/cm ²	
80° C HOLDING POWER:	1.0	

* EN 60454 / ** ASTM D-1000

Rev.1/ 22, Mar. 22